



Horizontal Directivity



Vertical Directivity



Impedance

## MODEL S5i-C



## TECHNICAL SPECIFICATIONS



Based largely on our flagship S5m. This is the center channel implementation. Here we have adapted the design for inwall applications. Shallow 4" mounting depth and integral aluminum extrusion rear enclosure insure consistent performance and minimal sound propagation to adjacent rooms. Featuring our proprietary DPC-Array controlling Mid/High frequencies, centered by our finest 28mm Beryllium dome and dual 28mm TPCD ultra-lightweight domes. All transducers are developed ground up by our engineers – bringing decades of research, culminating in this world class design. We teamed up with companies in the USA and Sweden to bring modern material science to hi-fi. Utilizing advanced Comsol acoustical modeling, our DPC-array is the result of 18 months of painstaking simulations and prototyping. The result is one of the most technologically advanced loudspeakers available. This new tweeter/waveguide DPC-Array delivers amazing accuracy, smoothness, and directivity control to handle the critical vocal range and delicate treble. All S-Series speakers share the same DPC-Array and benefit from our unique timbre matching technique across the entire series. Another Perlisten inwall loudspeaker to be certified for THX Dominus - their highest rating.

### BASIC

**Dimensions (HxWxD)**  
298 x 665 x 111mm  
11.8 x 26.2 x 4.4"

**Mounting dimensions (HxWxD)**  
257 x 624 x 101.7mm  
10.1 x 24.6 x 4.0"

**Weight**  
15.9 kg (35.0 lbs.)

**Available finishes**  
White grille, Black baffle

### TECHNICAL

**Enclosure Alignment**  
3-way acoustic suspension

**Driver complement**  
DPC-Array: 28mm Beryllium  
28mm(2) Textreme TPCD  
Woofers: 180mm(2) Textreme TPCD

**Sensitivity (2pi)**  
91.6dB / 2.83v / 1.0m

**Impedance**  
4Ω nominal / 3.2Ω min

**Response Linearity**  
80 - 20kHz +/-1.5dB window

**Frequency Response (-10dB)**  
50 - 37kHz

**Typical In Room bass extension**  
42Hz

**Recommended Amplifier Power**  
100 - 350W RMS

**SPL capability @1m (100-20kHz)**  
117.0dB peak  
117.0dB peak <3% 2nd, 3rd Harmonics


**Certification**  
THX Dominus



**DPC Array**  
Directivity pattern control  
\*USA Patent pending



**TPCD**  
Thin Ply Carbon Diaphragms

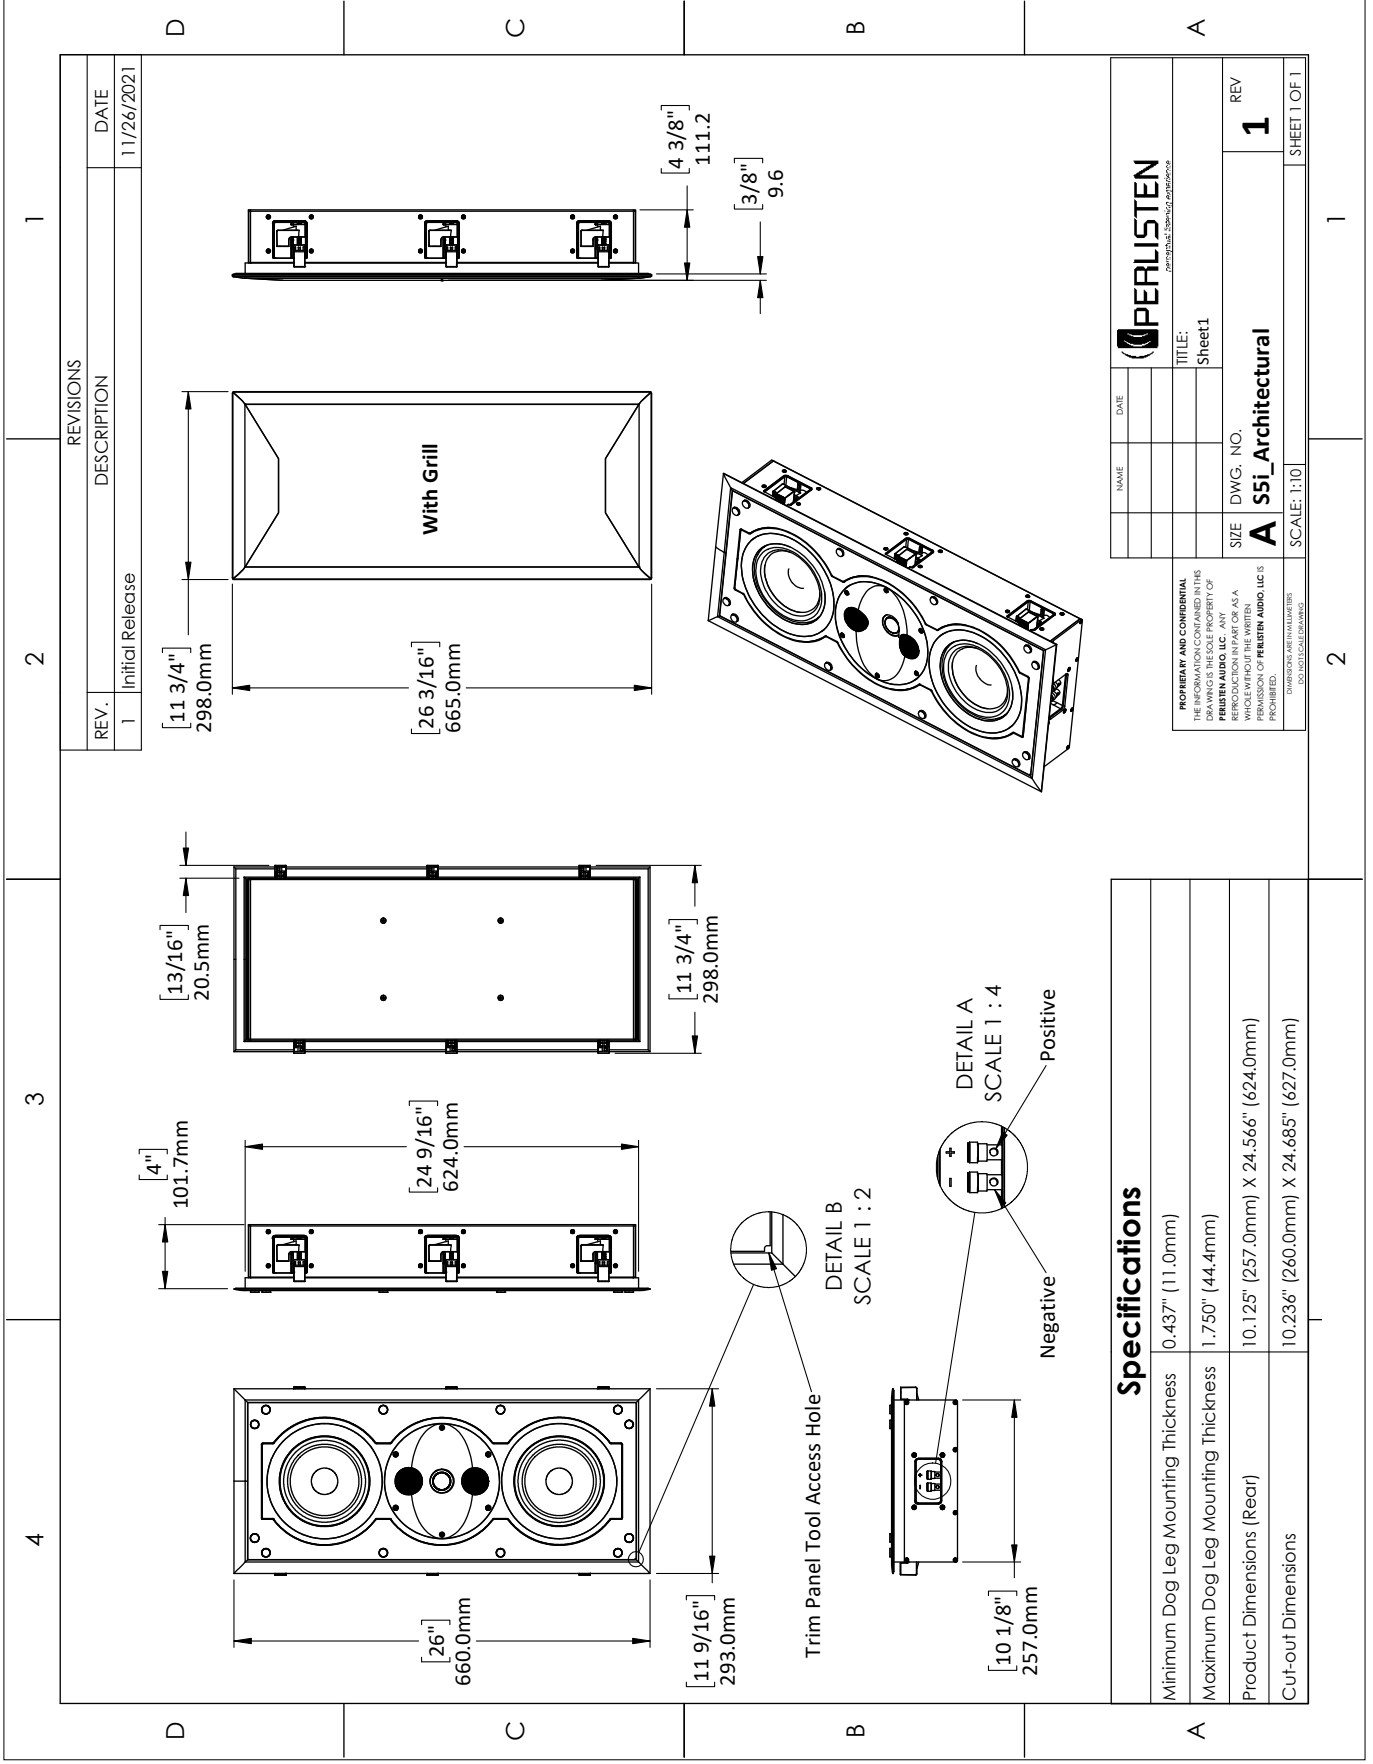

REVISIONS		DATE
REV.	DESCRIPTION	
1	Initial Release	11/26/2021

NAME	DATE
TITLE:	Sheet 1
SIZE	DWG. NO.
<b>A</b>	<b>S5i_Architectural</b>
REV	<b>1</b>
SCALE: 1:10	
SHEET 1 OF 1	

Specifications	
Minimum Dog Leg Mounting Thickness	0.437" (11.0mm)
Maximum Dog Leg Mounting Thickness	1.750" (44.4mm)
Product Dimensions (Rear)	10.125" (257.0mm) X 24.566" (624.0mm)
Cut-out Dimensions	10.236" (260.0mm) X 24.685" (627.0mm)

1

2

3

4

D

C

B

A

D

C

B

A

1

2

1

1